



# LED Grille Lamp-C

SC-GL-35-AW-01CW-C

SC-GL-35-AW-01NW-C

SC-GL-35-AW-01WW-C

## Description

New LED Troffer has the feature of high luminous efficiency, energy saving and long-life span, can replace LED Tube. Application: Hotels, meeting rooms, factories, offices, supermarkets, residential areas, schools, hospitals and other places which need high color rendering index.

## Features

1. Color: cool white(5500-6500K), nature white(3900-4500K) warm white(2700-3200K), other available.
2. Beam angle: 110°
3. Saving energy: 50%
4. Life span more than 50,000Hrs
5. IP code: Ip40
6. Standard warranty: 3years
7. Follow RoHS and CE Certified.

## Technical Parameter

Input Voltage: AC100-240V 50-60Hz

Max Current: 0.80A

LED type: 2835 SMD LED

Output Power: 35W

Reflector: frosted cover

Net weight: 2.8KG

Gross weight: 6.67KG(2PCS)

Inner box size: 660\*650\*310mm (6PCS per box)



## Applications

- Hotels
- Conference/Meeting rooms
- Factories and offices
- Commercial purposes
- Residential / Institution buildings
- Schools, colleges, universities and hospitals
- Places which needs energy saving and high color rendering index lighting.







## Specifications

| Model #            | CCT        | LED Type | Lumen(lm)<br>(±10%) | CRI | Beam<br>angle | Power(W)<br>(±10%) | Voltage<br>(V)        | PF | Weight<br>(Kg) |
|--------------------|------------|----------|---------------------|-----|---------------|--------------------|-----------------------|----|----------------|
| SC-GL-35-AW-01CW-C | 5500-6500K | 2835     | 3026lm              | >80 | /             | 35W                | AC100-240V<br>50-60Hz | /  | 2.8            |
| SC-GL-35-AW-01NW-C | 3900-4500K |          | 2837lm              | >80 | /             | 35W                |                       |    |                |
| SC-GL-35-AW-01WW-C | 2700-3200K |          | 2650lm              | >80 | /             | 35W                |                       |    |                |

## Dimensions (Unit: mm)

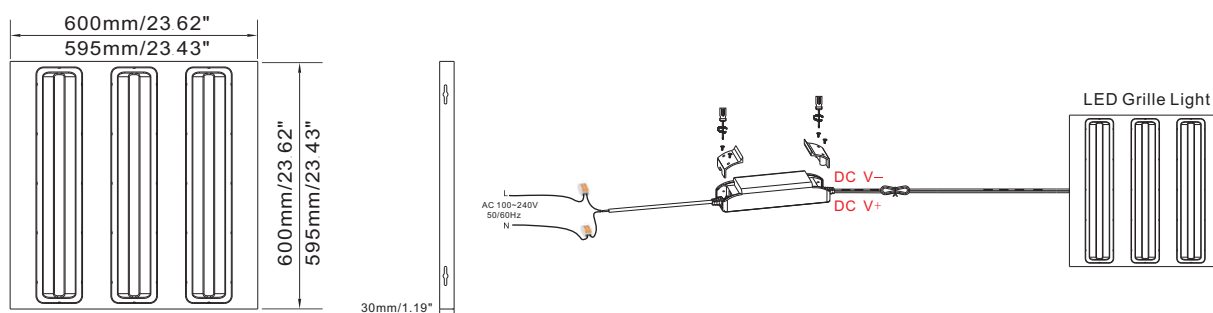

## How to fix

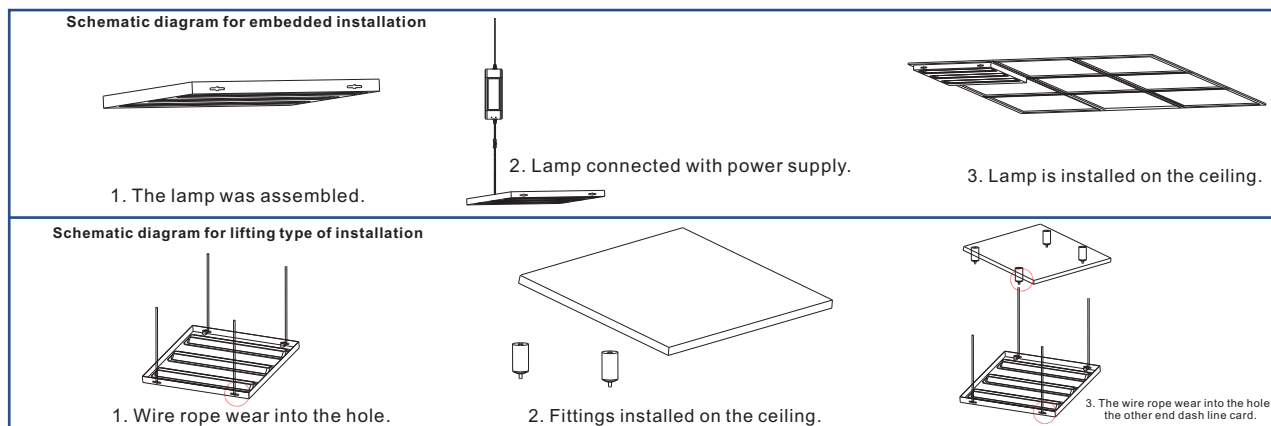

## ! Notice

1. Please read the specification first, to make sure the service environment matches the condition in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your personal safety.
5. Preliminarily estimate required quantity of LED flood lights, then according to the power rating of single flood light to figure out the total power and design power supply plan.
6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.
7. If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.